

# BATTERY HOLDER MODEL 041-0405-000

# LiftMaster®

## **WARNING**

To prevent possible **SERIOUS INJURY** or **DEATH**, disconnect electric power to operator **BEFORE** installing. **ALL** electrical connections **MUST** be made by a qualified individual.

## **CAUTION**

To prevent damage to the receiver/logic board, **DO NOT** touch printed circuit board of replacement receiver/logic board during installation.

**ALWAYS** wear protective gloves and eye protection when changing the battery or working around the battery compartment.




**WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

This service kit includes:

- Battery Holder Assembly (1)
- Blank Battery Holder Label

## REPLACING THE BATTERY HOLDER

1. Disconnect power.
2. Remove the lower front cover (A).
3. Disconnect and remove the batteries from the battery compartment (B).
4. Disconnect the wires coming from the safety reversing sensors, door control, door lock, and cable tension monitor (if installed) from the logic board (C).
5. Remove the 4 screws securing the battery holder to the main chassis to remove it (D).
6. Before discarding the old battery compartment, copy the printed information from the label to the blank label provided on the new battery compartment.
7. Attach the replacement battery compartment to the main chassis using the same 4 screws (D).
8. Reconnect the wires coming from the safety reversing sensors, door control, door lock, and cable tension monitor (if installed) from the logic board (C). Route the long antenna through the slot in the battery holder (E).
9. Install the batteries and connect the battery connectors (B).
10. Replace the lower front cover on the operator (A).
11. Reconnect power.

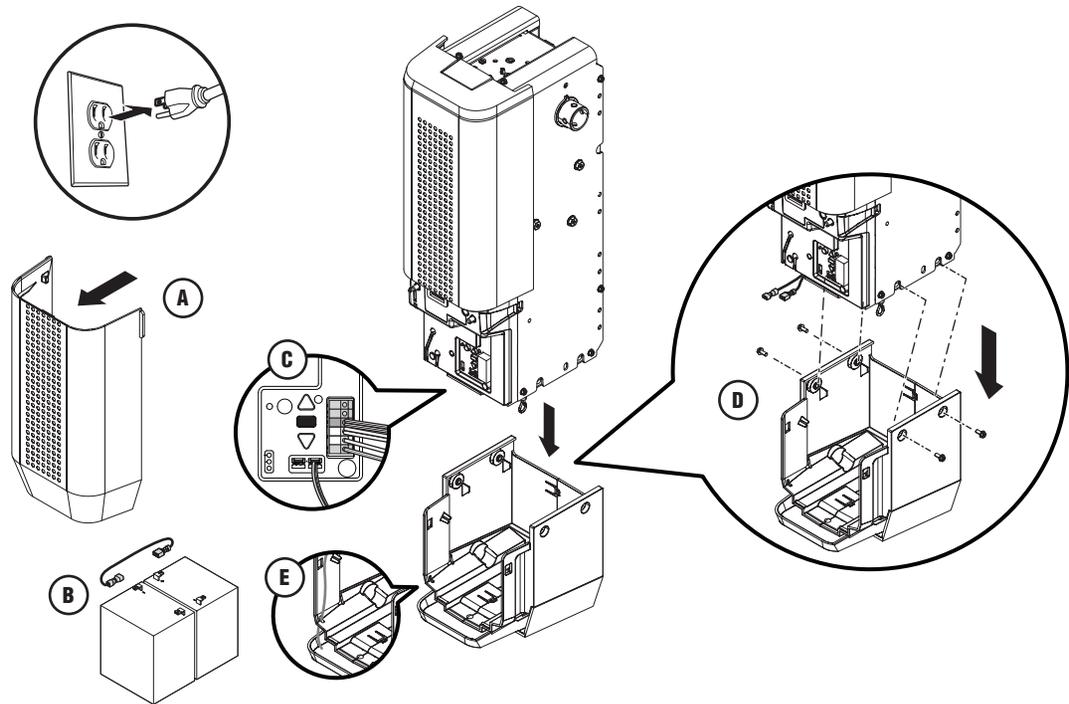

**NOTICE:** This device complies with Part 15 of the FCC rules and Industry Canada's license-exempt RSSs. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device must be installed to ensure a minimum 20 cm (8 in.) distance is maintained between users/bystanders and device.

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules and Industry Canada ICES standard. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**For more information, please visit [www.devancocanada.com](http://www.devancocanada.com) or call toll free at 855-931-3334**