

LiftMaster®


REMOTE LIGHT CONTROL MODEL 825LM

OVERVIEW

The Remote Light Control module offers a quick and convenient way to control the lights in your home. The module can be programmed to a remote control, a garage door opener, or a MyQ™ Internet Gateway Accessory. The module is compatible with up to 8 Security+ 2.0™ remote controls **OR** a combination of up to 8 MyQ™ enabled garage door openers or MyQ™ Internet Gateway Accessories. This product is **NOT** to be used for appliances.

SPECIFICATIONS

Fluorescent	600W / 5A
Tungsten	600W / 5A
LED	600W / 5A
Electronic Ballast (Fluorescent)	599W / 4.99A
Re-lamp with listed SBCFL only, 599W total, maximum	



⚠ WARNING

To prevent possible **SERIOUS INJURY** or **DEATH** from electrocution or fire, the light control is **ONLY** for indoor use.

NOTICE: To comply with FCC and/or Industry Canada (IC) rules, adjustment or modifications of this transmitter are prohibited. **THERE ARE NO USER SERVICEABLE PARTS.**


This device complies with Part 15 of the FCC rules and IC RSS-210. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

MODES OF OPERATION

The module can be programmed to a Security+ 2.0™ remote control, a MyQ™ enabled garage door opener, or a MyQ™ Internet Gateway Accessory.

REMOTE CONTROL OPERATION:

Allows you to activate the module from a remote control.



GARAGE DOOR OPENER OPERATION:

Allows you to synchronize the module with your garage door opener light bulbs.

Example: The garage door opener light bulbs are set to automatically turn off after 4 ½ minutes, the module will also turn off after 4 ½ minutes.




MyQ™ GATEWAY OPERATION:

Allows you to activate the module from a web browser or smart phone (requires the MyQ™ Internet Gateway Accessory, Model 828LM).




INSTALLATION & PROGRAMMING


1 Plug the lamp into the module and plug the module into an electrical outlet (the LED on the module will flash). **NOTE:** Make sure the lamp is switched ON.

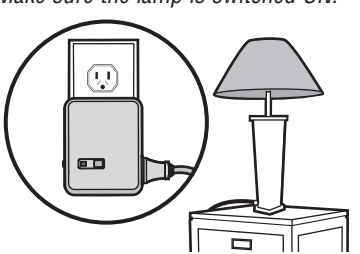


2 If the lamp is not ON, press and release the Power button on the module to turn the lamp ON.

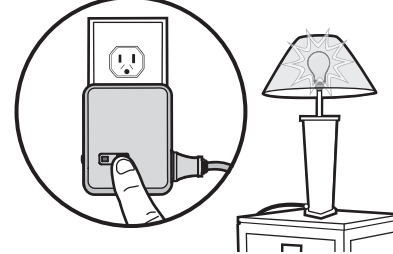


3 Press and release the Learn button on the module (the LED on the module will light).



4 Press the button on the remote control. **OR** Press the Learn button on the garage door opener. **OR** Visit www.myliftmaster.com. Go to "Manage Devices", then "Learn Device" to program the MyQ™ Internet Gateway Accessory.

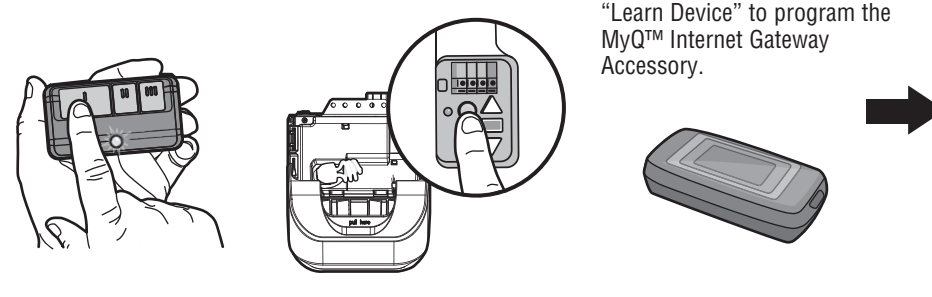

The lamp's light bulb will blink and the LED on the module will turn OFF when the device has been programmed.

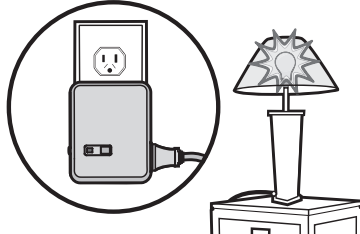

TO ERASE ALL PROGRAMMING

Press and hold the Learn button on the module for 6 seconds. All programming is now erased.

ONE YEAR LIMITED WARRANTY

The Chamberlain Group, Inc. warrants to the first retail purchaser of this product that is free from defect in materials and/or workmanship for a period of 1 year from the date of purchase.

For more information, please visit www.devanccanada.com or call toll free at 855-931-3334

HOW TO ORDER REPAIR PARTS

DEVANCO CANADA

19192 HAY ROAD, UNIT Q
SUMMERSTOWN, ON K0C 2E0

TOLL FREE: 855-931-3334
www.devancocanada.com

**WHEN ORDERING REPAIR PARTS
PLEASE SUPPLY THE FOLLOWING INFORMATION:**

- ✓ PART NUMBER
- ✓ DESCRIPTION
- ✓ MODEL NUMBER