




HOMELINK® REPEATER KIT

INTRODUCTION

The HomeLink® Repeater Kit is designed to allow compatibility between a new Chamberlain, Sears Craftsman, or LiftMaster* garage door opener and the HomeLink® system in your vehicle. Refer to the your vehicle owner's manual for specific instructions on programming the HomeLink® system. Your model may look different than illustrated in this programming guide.


* Chamberlain and LiftMaster are Trademarks of Chamberlain Group. Sears is a Trademark of Sears Roebuck.

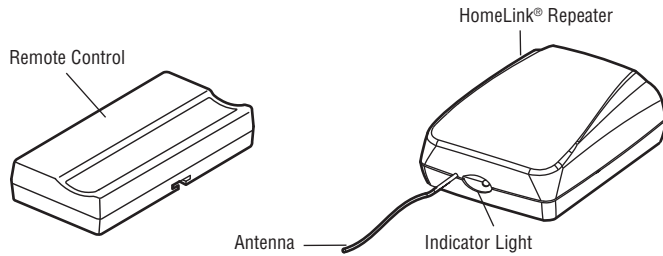


INSTALL AND PROGRAM THE HOMELINK® REPEATER

Be sure that your vehicle is parked outside of the garage before programming the HomeLink® Repeater Kit. Two people may be needed to program the HomeLink® system.


1. Program the **new** remote control included with the HomeLink® Repeater Kit to the Homelink® button in your vehicle. Refer to the owner's manual for your vehicle for programming steps.




2. Plug the HomeLink® Repeater into a 120 Vac polarized outlet, located as close as possible to your garage door opener.



3. Straighten the antenna.



4. Press and release the **YELLOW** Learn button on the garage door opener. The Learn LED will glow steadily.



⚠️ WARNING

To prevent possible **SERIOUS INJURY** or **DEATH** from a moving gate or garage door:


- ALWAYS keep remote controls out of reach of children. NEVER permit children to operate, or play with remote control transmitters.
- Activate gate or door **ONLY** when it can be seen clearly, is properly adjusted, and there are no obstructions to door travel.
- ALWAYS keep gate or garage door in sight until completely closed. NEVER permit anyone to cross path of moving gate or door.

NOTICE: To comply with FCC and/or Industry Canada (IC) rules, adjustment or modifications of this receiver and/or transmitter are prohibited, except for changing the code setting or replacing the battery. THERE ARE NO OTHER USER SERVICEABLE PARTS.


Tested to Comply with FCC Standards FOR HOME OR OFFICE USE. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RATING: 120 Vac, 60Hz, 35mA

5. Within 30 seconds press and hold the programmed HomeLink® button in your vehicle.



6. Release the HomeLink® button when the garage door opener light blinks. If light bulbs are not installed in the garage door opener, two clicks will be heard. Programming is complete.



7. To ensure the garage door opener operates from the HomeLink® button, press the programmed HomeLink® button in the vehicle. If it does not operate the garage door opener, repeat the steps.



NOTES:

- If you are using the HomeLink® Repeater with a garage door opener that has a Battery Backup system, ensure the original remote control is programmed to the garage door opener and place it in your glove box for use in the event of a power outage.
- The remote control included in this Repeater Kit **MUST** be kept for future programming (i.e. a new vehicle, a new garage door opener, etc.).

For more information, please visit www.devancocanada.com or call toll free at 855-931-3334

***HOW TO ORDER
REPAIR PARTS***

DEVANCO CANADA

19192 HAY ROAD, UNIT Q
SUMMERSTOWN, ON K0C 2E0

TOLL FREE: 855-931-3334

www.devancocanada.com

**WHEN ORDERING REPAIR PARTS
PLEASE SUPPLY THE
FOLLOWING INFORMATION:**

- ✓ PART NUMBER
- ✓ DESCRIPTION
- ✓ MODEL NUMBER