


PREFORMED VEHICLE DETECTION LOOP PAVE-OVER / DIRECT BURIAL STYLE (FLEXIBLE)

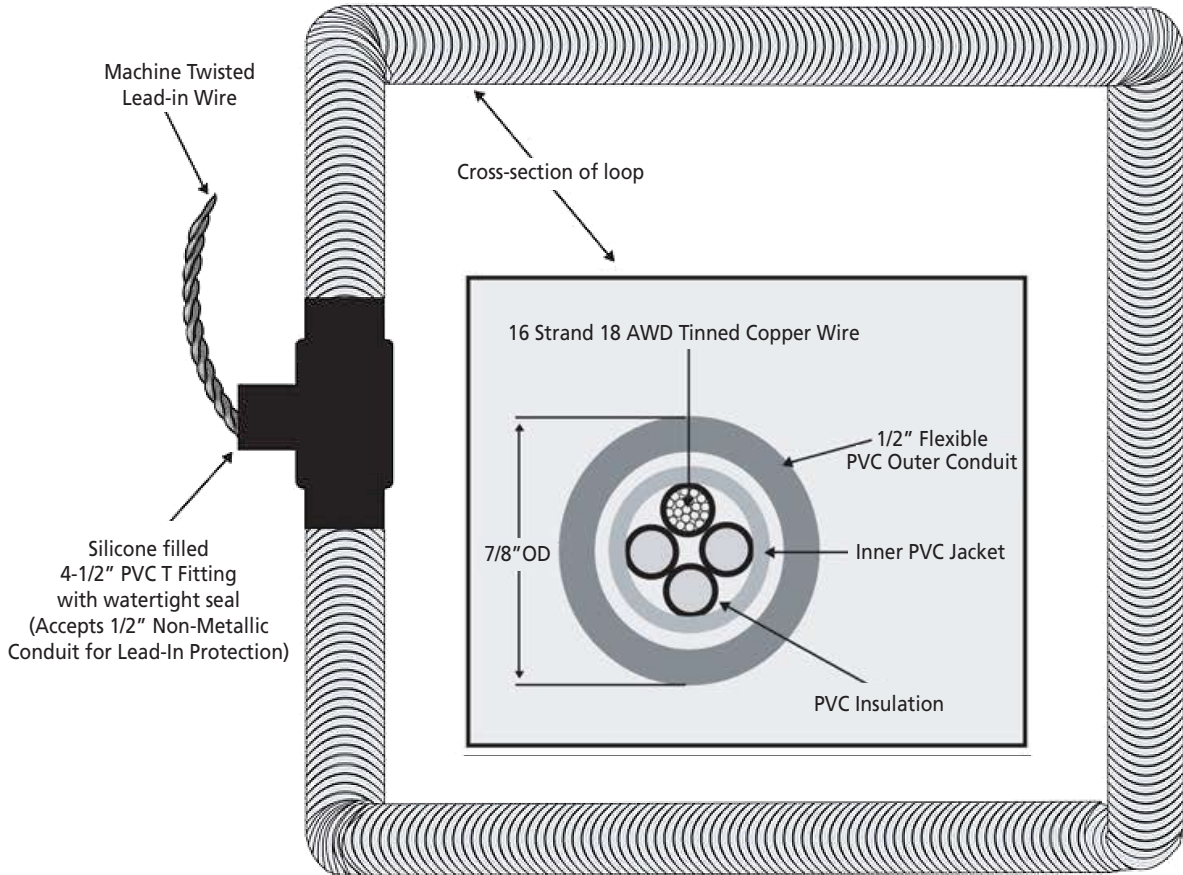

SPECIFICATIONS

Standard Loop Sizes

2'x6'	4'x12'	6'x12'
3'x6'	4'x16'	6'x15'
4'x3'	4'x20'	6'x16'
4'x6'	4'x33'	6'x20'
4'x8'	5'x10'	6'x24'
4'x10'	6'x10'	6'x42'

Custom loop sizes are available.

Standard Lead-in Length 50'

Custom lead-in lengths are available.
(Up to 500 feet)

Loop Wire

18GA, 16 strand Tinned Copper with PVC Insulation and Outer Jacket.

Lead-in

18GA Twisted Pair, 16 Strand XLP Insulated.

Conduit

Flexible Non-Metallic 1/2" Liquid Tight Conduit.

"T"

4-1/2" PVC T Fitting with watertight seal.
Accepts 1/2" Non-Metallic Conduit for Lead-in Protection.