


WIRELESS SYSTEM CHART



	SELWR433	SEL2641R433-I / IP	SEL2641R433-Z4	SEL2641R433-K8PM
Transmitter keys	unlimited	85	85	800 two-channel transmitters
Relays	-	1 NO relay + 1 NO/NC (24Vac)	2 NO relay + 2 NO/NC (24Vac)	1 NO relay + 1 NO/NC (24Vac)
Wiegand output	Yes	-	-	-
Pulse output	-	Yes	Yes	Yes
Latched output	-	-	Yes	Yes
Timed output	-	-	-	Yes (6 sec.)
PC programming	-	-	-	Yes
Plug-in memory back-up compatible	-	-	-	Yes
Input voltage	12 or 24V (AC or DC)	12 or 24V (AC or DC)	12 or 24V (AC or DC)	12 or 24V (AC or DC)
Current consumption	24 mA	25 mA (relay excited: 55 mA)	24 mA (2 relay excited: 41 mA)	95 mA (relay excited)
Dimensions	105 x 45 x 28 mm (4.1" x 1.75" x 1.1")	105 x 45 x 28 mm (4.1" x 1.75" x 1.1")	80 x 80 x 50 mm (3.1 x 3.1 x 2 in)	180 x 140 x 68 mm (7 x 5.5 x 2.7 in)
Operating temp.	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-10°C to 55°C
Compatible Remotes	 SETR2641AM1.AN SETR2641AM2R SETR2641AM2.C S2TR2641E2 S7TR2641E4 SETR2641AM2.N SETR2641AM2.B SETR2641AM2.K S2TR2641E4			

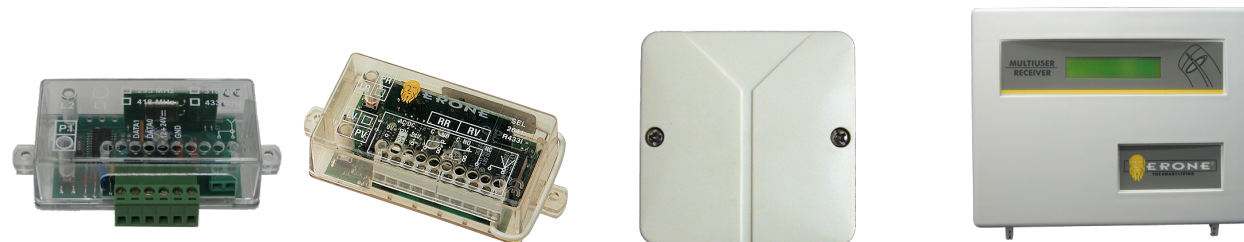


	WRW	WR2LCD	WR4	WRM
Transmitter keys	unlimited	85	85	800 two-channel transmitters
Relays	-	1 NO relay + 1 NO/NC (24Vac)	2 NO relay + 2 NO/NC (24Vac)	1 NO relay + 1 NO/NC (24Vac)
Wiegand output	Yes	-	-	-
Pulse output	-	Yes	Yes	Yes
Latched output	-	Yes	Yes	Yes
Timed output	-	Yes	-	Yes (6 sec.)
PC programming	-	-	-	Yes
Plug-in memory back-up compatible	-	-	-	Yes
Input voltage	12 or 24V (AC or DC)	12 or 24V (AC or DC)	12 or 24V (AC or DC)	12 or 24V (AC or DC)
Current consumption	24 mA	25 mA (relay excited: 55 mA)	24 mA (2 relay excited: 41 mA)	95 mA (relay excited)
Dimensions	105 x 45 x 28 mm (4.1" x 1.75" x 1.1")	105 x 45 x 28 mm (4.1" x 1.75" x 1.1")	80 x 80 x 50 mm (3.1 x 3.1 x 2 in)	180 x 140 x 68 mm (7 x 5.5 x 2.7 in)
Operating temp.	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-10°C to 55°C
Compatible Remotes	 R1 R2 R2T R4			

WIRELESS SYSTEM CHART

UNIVERSAL



	RXCUBE
Transmitter keys	250
Relays	1
Wiegand output	-
Pulse output	Yes
Latched output	Yes
Timed output	Yes
APP programming	Apple & Android
Plug-in memory back-up compatible	-
Input voltage	12 or 24V (AC or DC)
Current consumption	120 mA @12 Vac (max)
Dimensions	44 x 58 x 25 mm (1.7" x 2.3" x 0.98")
Operating temp.	-20°C to 65°C
Compatible Remotes	  * Not Compatible with Radium AES remotes



	WRAES
Transmitter keys	Wiegand Mode: unlimited Stand-alone Mode: 500
Relays	2
Outputs	Relay, Wiegand, RS-485
Pulse output	Yes
Latched output	Yes
Timed output	Yes
PC programming	-
Plug-in memory back-up compatible	Yes
Input voltage	12 or 24V (AC or DC)
Current consumption	25 mA to 50 mA (max)
Dimensions	81.5 x 123 x 41.5 mm (3.2" x 4.8" x 1.6")
Operating temp.	-10°C to 60°C
Compatible Remotes	   R1AES R2AES R2TAES

**ALSO AVAILABLE
WITH BUILT-IN
PROXIMITY TAG**

RKIT



WR2LCD



R2T

R2T

RKITAES



WREAS



R2TAES

R2TAES