

RADIOEM 144

MULTI DOOR RADIO CONTROL TRANSMITTER
ROLLING CODE

STANDARD FEATURES

- 3-button transmitter.
- Operates up to 144 doors by using a combination of 2-rotary dials.
- Easy pairing and programming with the operator's on-board radio receiver for hassle-free use.
- Open/Close/Stop function.
- Soft-touch push buttons, including a bright red stop-button for easy identification.
- LED indicator.
- Nema 1 enclosure.
- Approx. 100' range.
- Hand held, wall or post mount.
- For use in commercial/industrial facilities.
- Robust and user-friendly system.
- Retrofits with existing Manaras-Opera rolling code transmitters and receivers. No need to change other devices.
- Compatible with most commercial operator brands on the market (in conjunction with RADIORE901).
- FCC/Industry Canada RF Device Approval.

OPTIONS (SEE REVERSE)

- The Series «100» line has been designed for new installations yet is also compatible and can retrofit with any older generation Series «100» Manaras-Opera rolling code radio controls.



- **Featuring Innovative Rolling Code Technology**
- **Improved Product Quality, Reliability and Durability**
- **Superior Signal Range**
- **Simplified Pairing and Programming**

The new RADIOEM 144 features the latest rolling code technology, improved reliability and superior range.

Users have the versatility of controlling up to 144 doors with three-button open / close / stop functionality providing easy access to any commercial or industrial building.

RADIOEM 144 conveniently retrofits and is compatible with any older generation Manaras-Opera rolling code (Series «100») transmitter or receiver.



- MEMBER OF THE CANIMEX GROUP -

**When you think
Commercial Door OPERATORS,
just think OPERA.**

Product Specification Sheet


RADIOEM 144

MULTI DOOR RADIO CONTROL TRANSMITTER
ROLLING CODE

TECHNICAL SPECIFICATIONS


Installation:	Hand Held, Wall or Post Mount
Technology:	Rolling Code Technology
No. of Buttons:	3-Button
Configuration when used with ECB Operators:	Open/Close/Stop Functionality
Configuration when used with HW Operators:	Open/Close/Stop Functionality (When paired with Universal Receiver RADIORE901, RADIORE901A, RADIORE901B)
Housing Materials:	ABS
Protection Class:	Nema 1
Range:	Approx. 100ft. (30m)
Power Supply:	AA 1.5V Battery (2x)
Frequency:	900 MHz
Color:	Dark Grey
Compatible With:	Rolling Code: RADIOEM101, RADIOEM102, RADIOEM103SD, RADIOEM103MD, RADIOEM104, KEYLESS042, RADIORE901, RADIORE901A, RADIORE901B

DIMENSIONS

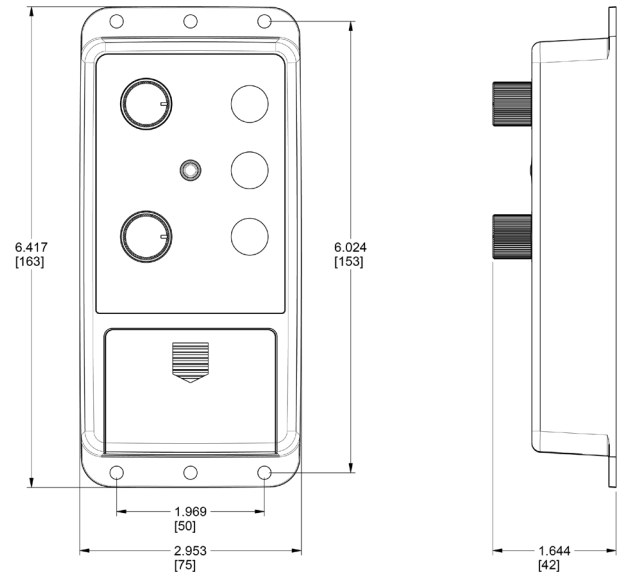

The Series «100» rolling code transmitters/receivers are not compatible with dip switch technology.

OTHER PRODUCTS IN THE SERIES «100»

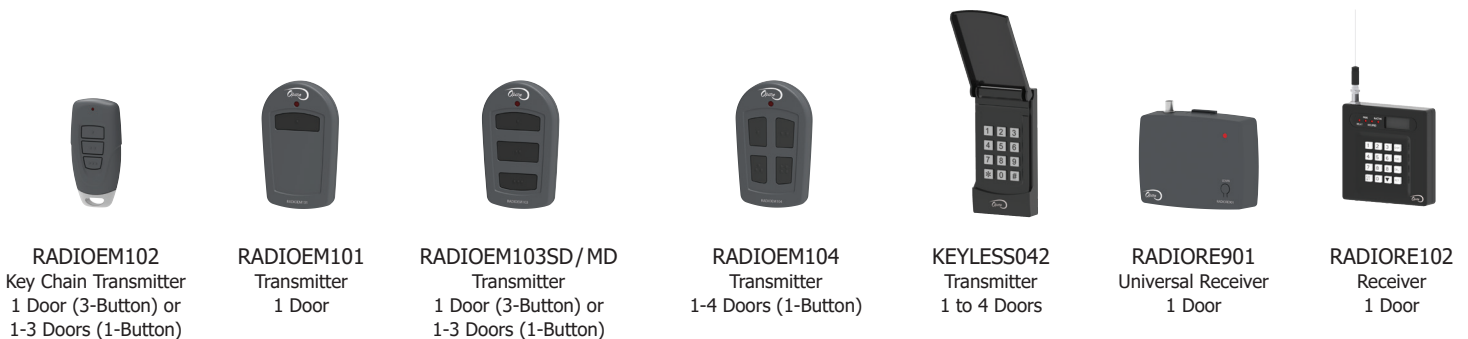

- MEMBER OF THE CANIMEX GROUP -

Manaras-Opera reserves the right to make specification or design changes without prior notice.
2020 9141-0720 Québec Inc. All rights reserved. Reg. T.M. of 9141-0720 Québec Inc.

HOW TO ORDER REPAIR PARTS

DEVANCO  **CANADA**

19192 HAY ROAD, UNIT Q
SUMMERSTOWN, ON, K0C 2E0

TOLL FREE **1-855-931-3334**
WWW.DEVANCOCANADA.COM

**WHEN ORDERING REPAIR PARTS
PLEASE SUPPLY THE FOLLOWING INFORMATION:**

- ✓ **PART NUMBER**
- ✓ **DESCRIPTION**
- ✓ **MODEL NUMBER**